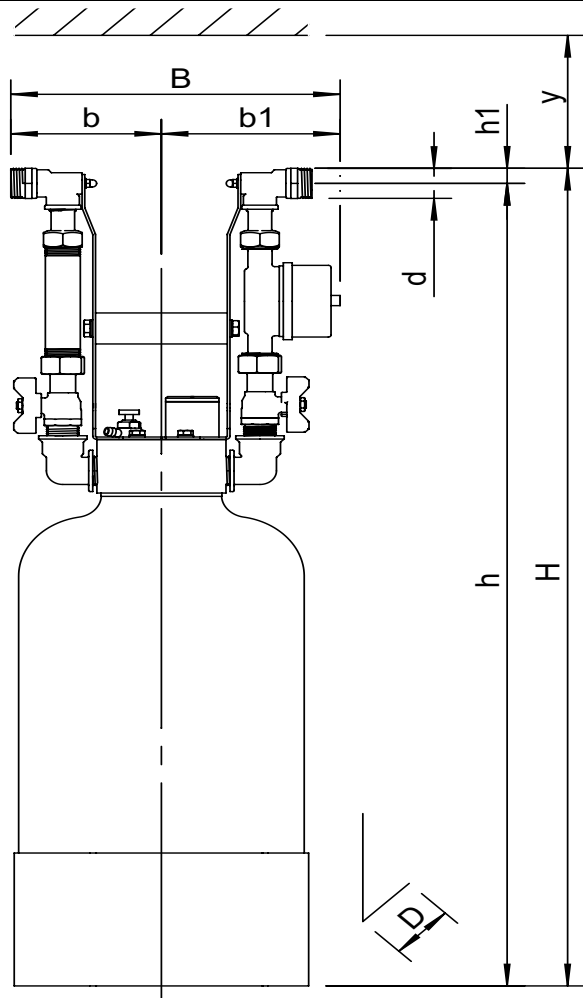


SPIROTECH SPECIFICATION SHEET		SPIROTECH 	
SpiroPure ProFill 9.5			
Customer:		Type:	G76.359
Project:			
Reference:			
Design criteria		Drawing	
Medium:	Water		
Processing Capacity	600 l/h		
Max. Filling Capacity	1350 l		
@420µS/cm to <100µS			
Min. Pressure:	1.0 bar-g		
Max. pressure:	8.0 bar-g		
Min. Temperature:	5 °C		
Max. temperature:	40 °C		
Connections			
Inlet / outlet	G3/4"		
Testing and quality assurance			
Test certificate:	no		
Material certificates:	no		
Compliance:	VDI 2035, ÖNORM H 5195-1 SWKI BT 102-8		
Construction materials			
Head:	PVC		
Connections	Brass		
Tank base	PP		
Tank thread:	PA66		
Tank winding:	FRP		
Tank Inliner:	HDPE		
Handle:	Stainless steel		
LED housing:	POM		
Pressure gauge:	Plastic, Iron, Brass		
Cartridge:	Polystyrol		
Resin:	synthetic polymer		
Dimensions			
Height:	739 mm		
Width:	245 mm		
Depth:	221 mm		
B	245 mm		
b	112 mm		
b1	133 mm		
d	G3/4"		
D	221 mm		
H	739 mm		
h	725 mm		
h1	14 mm		
y	50 mm		
Weight:	12.1 kg		
Resin Volume:	9.5 l		
LED Power:	Battery - CR2450		
Subject to changes			